



INSTRUCTIONS

-J04316

REV. 2008-01-02

XR1200 TANK BAG

GENERAL

Kit Number

88227-08

Models

For model fitment information, please see the P&A Retail Catalog or the Parts and Accessories section of www.harley-davidson.com (English only).

Kit Contents

Table 1. Service Parts

Item	Description (Quantity)	Part Number
1	Mounting strap	88278-08
2	Map pocket	88289-08



Figure 1. Tank Bag Installed

INSTALLATION


WARNING

Improper loading of cargo or installation of accessories can affect motorcycle stability and handling, which could result in death or serious injury. (00121a)

- Keep cargo weight concentrated close to the motorcycle and as low as possible to minimize the change in the motorcycle's center of gravity. Distribute weight evenly on both sides of the vehicle and do not load bulky items too

far behind the rider or add weight to the handlebars or front forks.

- Be sure cargo is secure and will not shift while riding. Periodically recheck load.
- Ensure that the bag strap buckles are secure.
- Secure straps, keep away from rear wheel.
- Do not put more than 10 pounds (4.5 kg) in bag.

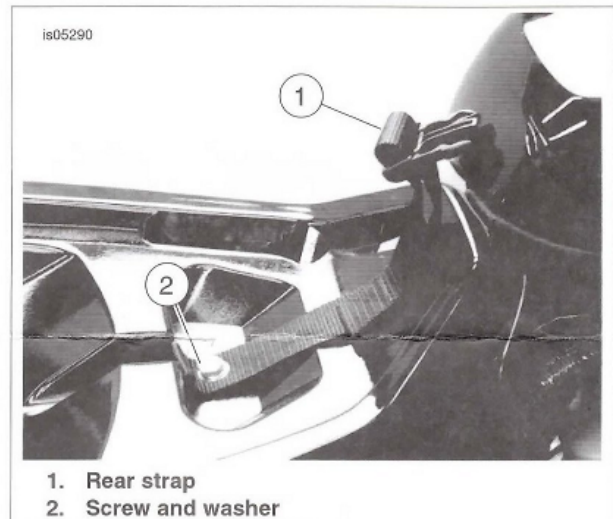

1. Rear strap
2. Screw and washer

Figure 2. Tank Bag Rear Strap



1. Tank bag strap

Figure 3. Tank Bag Front Straps

1. Remove the riders seat by releasing the two tabs under the seat base.
2. See Figure 2. Remove the seat base front screw and washer (2).
3. Attach the tank bag strap using the screw and washer from the previous Step. Place the washer on the screw and insert it through the grommet of the strap, the seat base and into the frame. Tighten the screw to 70-120 in-lbs (8.1-13.6 Nm).
4. See Figure 3. Lay the bag on the tank insert the "T" end of the strap (1) into the slot on the neck of the frame. Repeat for the strap on the opposite side.
5. Pull both front straps and the rear strap tight. Check that the bag is properly positioned and secure on the motorcycle.